



**FlexFit**  
1537 & 1529




Thomas Regout International B.V. offers a broad range of linear motion solutions that help move your application in any direction: horizontal, vertical or diagonal.

Challenge us, in any way. We will present an innovative and integrated total solution, completely adapted to your specific needs and demands. In our own R&D department we design innovative sliding and linear motion systems. Incorporating the highest ISO international and environmental standards that ensure that our products and services are safe, reliable, sustainable and of high quality.

## FlexFit 1537 & 1529

The FlexFit guide is a combination of a profile and a carrier that enables multiple linear motion options. Our linear guides are uniquely designed for an easy and fast installation. These ready-to-use products are made of high quality components to guarantee a long service life. The FlexFit linear guides are typically used in vending and self-checkout machines, special vehicles and tooling cabinets.



### features and benefits


- 1 Ready-to-use product (no adjustment of carrier needed)
- 2 No play in guidance during lifetime
- 3 Easy and fast installation
- 4 Smooth movement
- 5 Available in 3 and 5-wheel carriers
- 6 Available in galvanised steel and stainless steel
- 7 Customized fixations possible
- 8 Horizontal, vertical & diagonal movement
- 9 Rubber Stop with special TPU buffer (minimize impact forces) available
- 10 Easy pairwise application
- 11 Competitive price/quality ratio



Rubber Stop



## Technical specifications

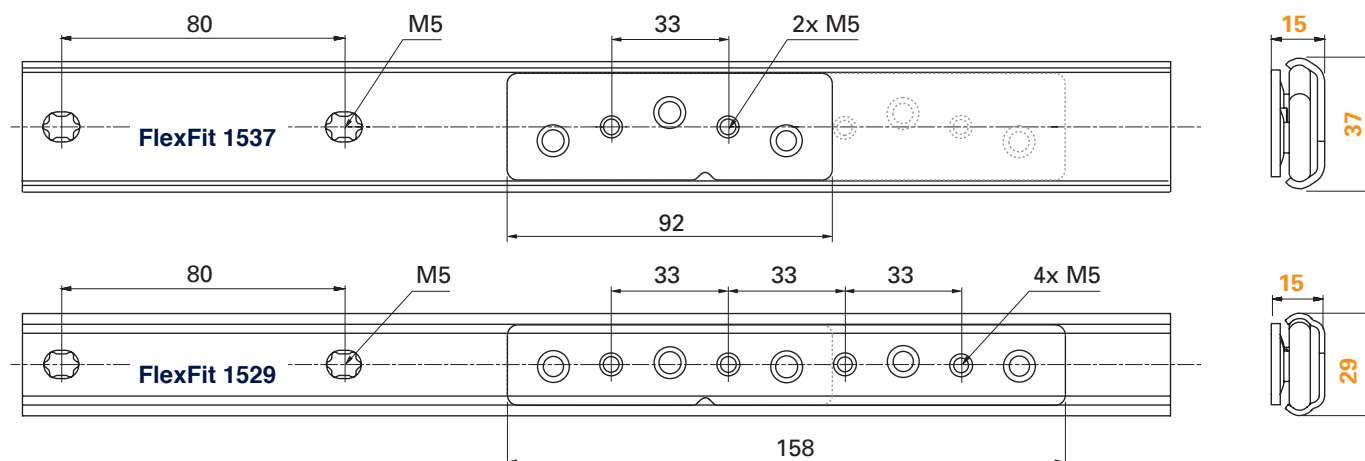

|                                           | FlexFit 1537                               |                 | FlexFit 1529                               |                 |
|-------------------------------------------|--------------------------------------------|-----------------|--------------------------------------------|-----------------|
| Carrier Stainless steel*                  | 3 wheel                                    | 5 wheel         | 3 wheel                                    | 5 wheel         |
| Article number                            | 205S01                                     | 205S02          | 205S05                                     | 205S06          |
| Length                                    | 92 mm                                      | 158 mm          | 92 mm                                      | 158 mm          |
| Weight                                    | 0.11 kg                                    | 0.18 kg         | 0.09 kg                                    | 0.14 kg         |
| Load capacity                             | Radial 800N                                | Radial 1150N    | Radial 425N                                | Radial 650N     |
| Fixation (threaded hole at pitch 33 mm)   | 2x M5                                      | 4x M5           | 2x M5                                      | 4x M5           |
| Profile                                   | Galvanised**                               | Stainless steel | Galvanised**                               | Stainless steel |
| Article number                            | 205S03                                     | 205S098         | 205S07                                     | 205S108         |
| Length                                    | 2394 mm                                    | 3994 mm         | 2394 mm                                    | 3994 mm         |
| Weight                                    | 0.76 kg/m                                  | 0.75 kg/m       | 0.5 kg/m                                   | 0.48 kg/m       |
| Fixation (fixing recommendation DIN 7991) | M5 countersunk at pitch 80 mm              |                 | M5 countersunk at pitch 80 mm              |                 |
| Profile and Carrier                       |                                            |                 |                                            |                 |
| Total width                               | 37 mm                                      |                 | 29 mm                                      |                 |
| Total thickness                           | 15 mm                                      |                 | 15 mm                                      |                 |
| Travel                                    | Minimum 80 mm                              |                 | Minimum 80 mm                              |                 |
| Service life                              | 60.000 cycles (60 km at max load capacity) |                 | 60.000 cycles (60 km at max load capacity) |                 |
| Rubber Stop Stainless steel***            | 37 x 12 x 30 mm                            | Weight: 0.04 kg | 29 x 12 x 30 mm                            | Weight: 0.03 kg |
| Article number                            | 205S118                                    |                 | 205S128                                    |                 |
| Tube of 20 g lubricant (Grease Gadus S2)  |                                            |                 |                                            |                 |
| Article number                            | 16901223                                   |                 | 16901223                                   |                 |

\* AISI 304

\*\* Steel: up to 96 hours before zinc corrosion

\*\*\* For further technical information: check Installation Manual Rubber Stop Flexfit.





---

**Thomas Regout International B.V.**

Industrieweg 40  
6219 NR Maastricht  
The Netherlands

T. +31 (0)43 351 66 66  
F. +31 (0)43 351 66 99

E. [sales@thomasregout.com](mailto:sales@thomasregout.com)

---

[www.thomasregout.com](http://www.thomasregout.com)

