
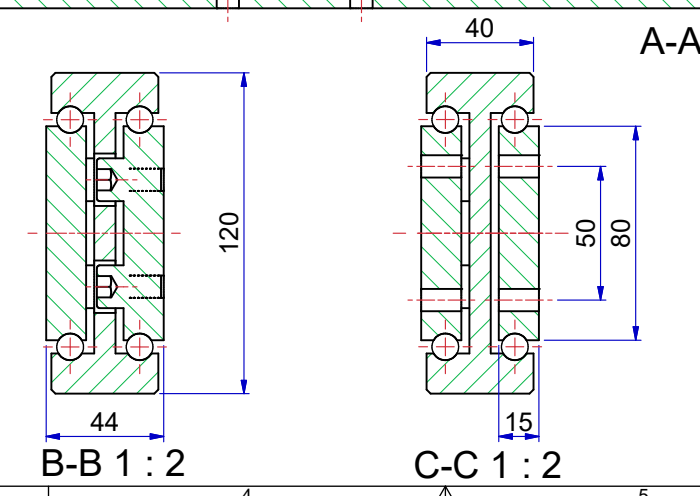


Slide number	Installation length L (mm)	Travel T (mm)	Load per pair (kg) steel	Dimension A	Dimension B	Dimension C
138120S03	300	300	1480	100	-	-
138120S04	350	350	1560	50	-	50
138120S05	400	400	1640	50	-	100
138120S06	450	450	1720	50	-	150
138120S07	500	500	1760	50	-	200
138120S08	550	550	1820	50	-	250
138120S09	600	600	1850	50	-	300
138120S10	650	650	1870	50	150	-
138120S11	700	700	1890	50	175	-
138120S12	750	750	1860	50	200	-
138120S13	800	800	1840	100	150	-
138120S14	850	850	1820	100	175	-
138120S15	900	900	1790	100	200	-
138120S16	950	950	1760	100	225	-
138120S17	1000	1000	1730	100	250	-
138120S18	1050	1050	1700	100	275	-
138120S19	1100	1100	1660	100	300	-
138120S20	1150	1150	1630	100	325	-
138120S21	1200	1200	1600	100	350	-

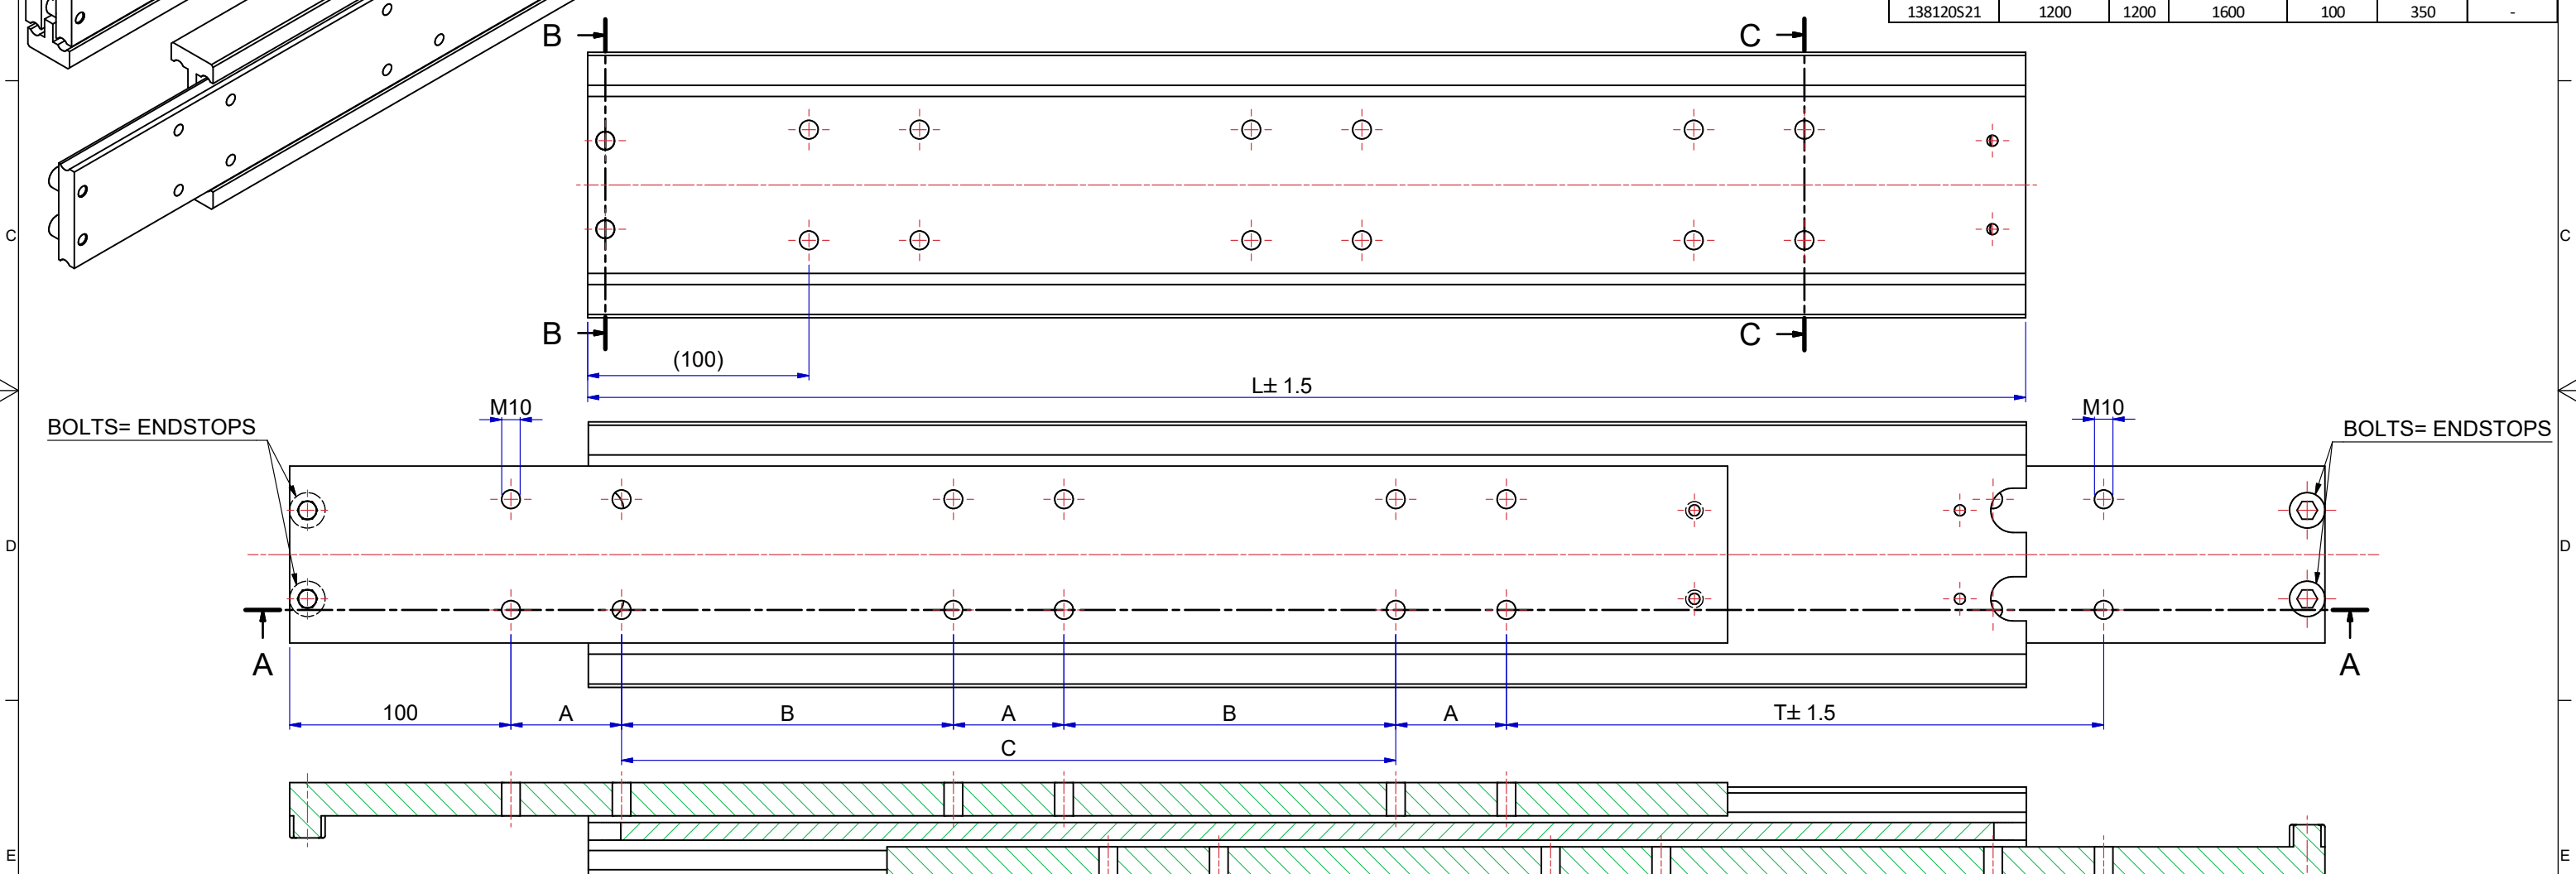

The load capacities are based on a 1% deflection test based on a simulation model (Finite Element Analysis)
 Load capacity in practice always depends on mounting use and other external factors that can influence this.
 Tolerance $\pm 0,5\text{mm}$ measured from reference point.

Designer	M.Urlings	Gen.Tol.Dim.	± 0.5	Third angle projection	Material				
Date	18-7-2018	Gen.Tol.Angle	± 0.5		Treatment				
Approver		Gen.Roughness	Ra		Draw type	Fabrication	Doc.No.	E000149178	
Date		Units	mm/deg.		Scale	1 : 2	Type		Model No.
Description									
SUPREME TR12044 - (44)									
								Released for Production	
Format	A2					Item No.	138120-Sxx	Revision	01
© THOMAS REGOUT INTERNATIONAL BV, Industrieweg 40, 6219 NR, Maastricht, The Netherlands, +31 (0)43 351 66 66 All rights are reserved.									

Rev	Date	Description	Designer
01	15-6-2023	REVISED MODEL AND TABLE.	R.G