




Slide number	Installation length L (mm)	Travel T (mm)	Load per pair (kg) steel	Dimension A	Dimension B	Dimension C
138100S30	200	200	250	50	-	-
138100S31	250	250	280	50	-	50
138100S32	300	300	320	50	-	100
138100S33	350	350	360	50	-	150
138100S34	400	400	390	50	-	200
138100S35	450	450	410	50	-	250
138100S36	500	500	425	50	-	300
138100S37	550	550	435	50	150	-
138100S38	600	600	420	50	175	-
138100S39	650	650	410	50	200	-
138100S40	700	700	400	50	225	-
138100S41	750	750	380	50	250	-
138100S42	800	800	360	50	275	-
138100S43	850	850	340	50	300	-
138100S44	900	900	320	50	325	-
138100S45	950	950	300	50	350	-
138100S46	1000	1000	285	50	375	-
138100S47	1050	1050	270	50	400	-
138100S48	1100	1100	255	50	425	-
138100S49	1150	1150	240	50	450	-
138100S50	1200	1200	230	50	475	-

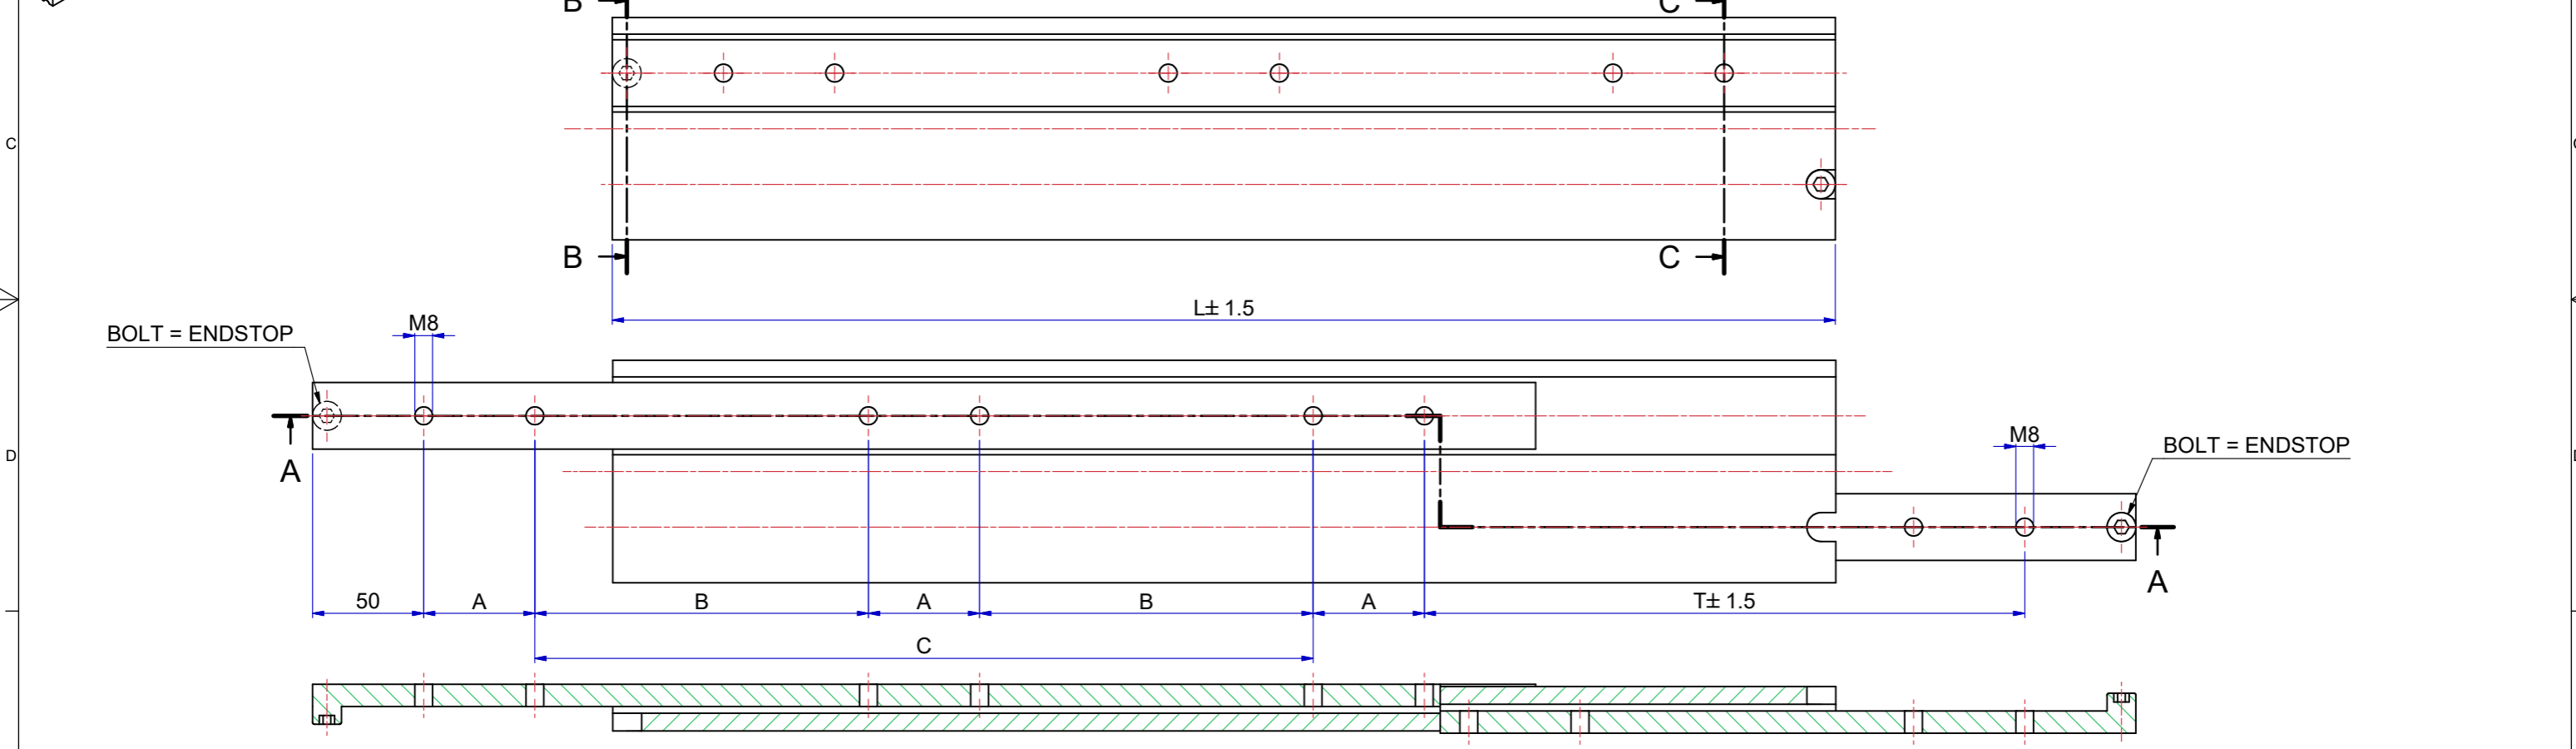

A-A

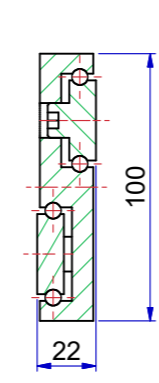

B-B

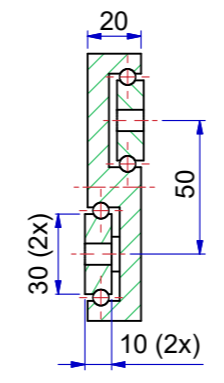

C-C

The load capacities are based on a 1% deflection test based on a simulation model (Finite Element Analysis)
 Load capacity in practice always depends on mounting use and other external factors that can influence this.
 Tolerance ± 0,5mm measured from reference point.

Designer M.Urlings	Gen.Tol.Dim. ± 0.5	Third angle projection	Material		
Date 19-7-2018	Gen.Tol.Angle ± 0.5		Treatment		
Approver	Gen.Roughness Ra		Draw type Fabrication	Doc.No. E000149206	
Date	Units mm/deg.		Scale 1 : 2	Type	Model No.
Description SUPREME TR10022 - (22)					
Format A2				Item No. 138100-Sxx	Released for Production
© THOMAS REGOUT INTERNATIONAL BV, Industrieweg 40, 6219 NR, Maastricht, The Netherlands, +31 (0)43 351 66 66 All rights are reserved.					

Rev	Date	Description	Designer
01	19-6-2023	REVISED MODEL AND TABLE.	R.G