
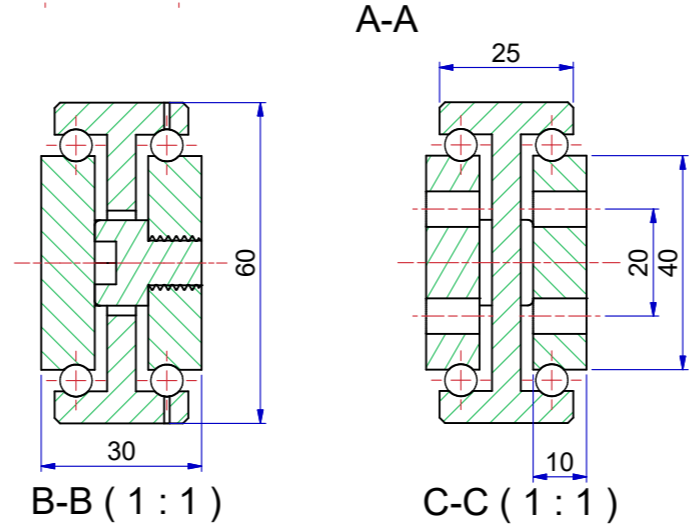
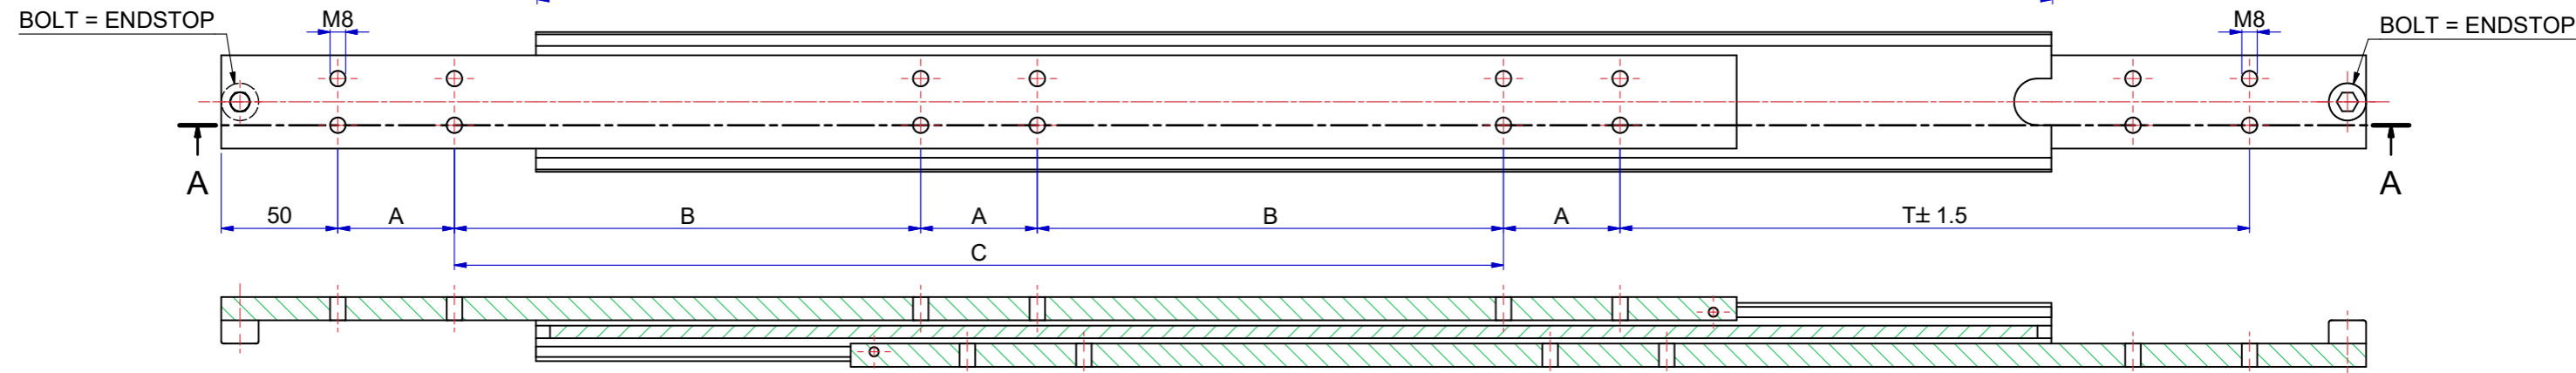


Slide number	Installation length L (mm)	Travel T (mm)	Load per pair (kg) steel	Load per pair (kg) stainless steel	Dimension A	Dimension B	Dimension C
13860S02	250	250	470	329	50	-	50
13860S03	300	300	480	336	50	-	100
13860S04	350	350	490	343	50	-	150
13860S05	400	400	500	350	50	-	200
13860S06	450	450	520	364	50	-	250
13860S07	500	500	530	371	50	-	300
13860S08	550	550	550	385	50	-	350
13860S09	600	600	560	392	50	-	400
13860S10	650	650	570	399	50	200	-
13860S11	700	700	580	406	50	225	-
13860S12	750	750	590	413	50	250	-
13860S13	800	800	600	420	50	275	-
13860S14	850	850	590	413	50	300	-
13860S15	900	900	580	406	50	325	-
13860S16	950	950	570	399	50	350	-
13860S17	1000	1000	560	392	50	375	-
13860S18	1050	1050	540	378	50	400	-
13860S19	1100	1100	520	364	50	425	-
13860S20	1150	1150	510	357	50	450	-
13860S21	1200	1200	500	350	50	475	-

MATERIAL	ITEM NUMBER
STEEL	13860-Sxx
STAINLESS STEEL	13860-Sxx8

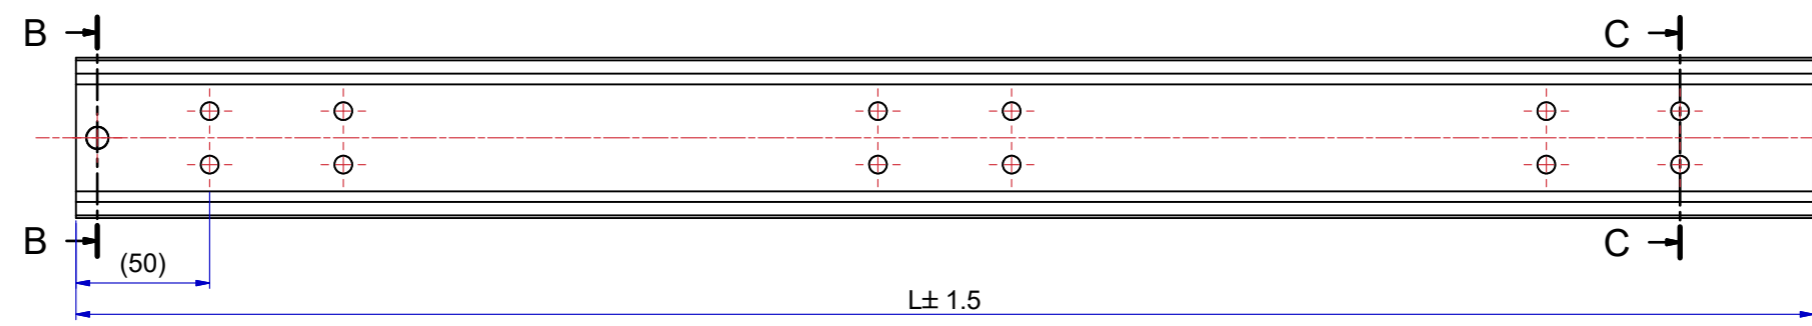

The load capacities are based on a 1% deflection test based on a simulation model (Finite Element Analysis)
 Load capacity in practice always depends on mounting use and other external factors that can influence this.
 Tolerance ±0,5mm measured from reference point.

Designer M.Urlings	Gen.Tol.Dim. ± 0.5	Third angle projection	Material	
Date 31-7-2018	Gen.Tol.Angle ± 0.5		Treatment	
Approver	Gen.Roughness Ra		Draw type Fabrication	Doc.No. E000148768
Date	Units mm/deg.		Scale 1 : 2	Type
Description SUPREME TR6030 - (30)				
Format A2			Item No. 13860-Sxx	Released for Production
© THOMAS REGOUT INTERNATIONAL BV, Industrieweg 40, 6219 NR, Maastricht, The Netherlands, +31 (0)43 351 66 66		All rights are reserved.		

Rev	Date	Description	Designer
1	2-6-2023	REVISED MODEL AND TABLE.	R.G