

TR-7619 Jumbo



Thomas Regout International B.V. offers a broad range of linear motion solutions that help move your application in any direction: horizontal, vertical or diagonal.

Challenge us, in any way. We will present an innovative and integrated total solution, completely adapted to your specific needs and demands. In our own R&D department we design innovative sliding and linear motion systems. Incorporating the highest ISO international and environmental standards that ensure that our products and services are safe, reliable, sustainable and of high quality.

TR-7619 Jumbo

The TR-7619 Jumbo slide is positioned above our heavy duty slides the ULF HD, Titan and Condor. This roll formed, extra heavy duty slide has a load capacity up to 325 kg with a minimal deflection. The product offers the highest degree of rigidity, robustness and includes high quality components to guarantee a long life cycle. This slide is up to 1500 mm length available from stock, with several features like a lock-in, lock-out and & front release. Custom made slides can be produced up to 2000 mm in length with customer specific requirements in coating, length, extension, features and mounting possibilities. These features are redesigned to operate in vertical direction. Thanks to its robustness the new lock in and lock out features can be used in heavy duty applications.



TR-7619 JUMBO



Lock-in and Lock-out




Lock-in/out Front release

features and benefits

- * Extreme robustness and rigidity
- * Up to 325 kg load capacity (10.000 cycles)
- * Improved lock in / lock out feature
- * Fast delivery
- * Slide length ranges from 300 mm up to 1500 mm
- * Custom made slide lengths range from 300 mm up to 2000 mm
- * Ball cage connectors to avoid ball cage migration
- * Patented Modular design ball cage
- * Up to 120 hours corrosion resistance
- * Customized mounting possibilities
- * Smooth movement



Technical specifications

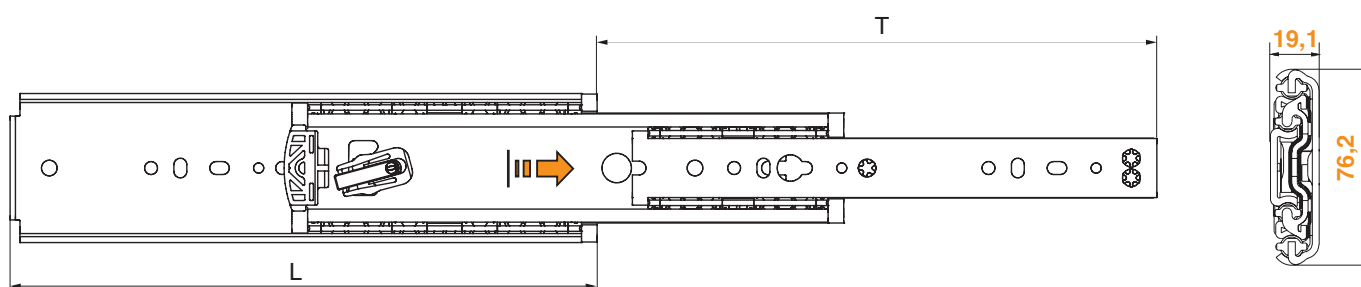

Description				Load capacity		Article number					
Width	Thickness	Lenght	Travel	Cycles			with lock in	with lock in	with lock out	with lock in/out	with lock in/out
mm	mm	mm	mm	10.000	50.000		left slide	right slide		left slide	right slide
76.2	19.1	300	298	225 kg	195 kg	114S31	114S31AL	114S31AR	114S31B	114S31DL	114S31DR
76.2	19.1	350	366	235 kg	200 kg	114S32	114S32AL	114S32AR	114S32B	114S32DL	114S32DR
76.2	19.1	400	398	250 kg	210 kg	114S33	114S33AL	114S33AR	114S33B	114S33DL	114S33DR
76.2	19.1	450	464	255 kg	220 kg	114S34	114S34AL	114S34AR	114S34B	114S34DL	114S34DR
76.2	19.1	500	512	260 kg	230 kg	114S35	114S35AL	114S35AR	114S35B	114S35DL	114S35DR
76.2	19.1	550	562	265 kg	240 kg	114S36	114S36AL	114S36AR	114S36B	114S36DL	114S36DR
76.2	19.1	600	610	275 kg	255 kg	114S37	114S37AL	114S37AR	114S37B	114S37DL	114S37DR
76.2	19.1	650	660	285 kg	265 kg	114S46	114S46AL	114S46AR	114S46B	114S46DL	114S46DR
76.2	19.1	700	708	295 kg	280 kg	114S38	114S38AL	114S38AR	114S38B	114S38DL	114S38DR
76.2	19.1	750	758	300 kg	290 kg	114S47	114S47AL	114S47AR	114S47B	114S47DL	114S47DR
76.2	19.1	800	806	310 kg	300 kg	114S39	114S39AL	114S39AR	114S39B	114S39DL	114S39DR
76.2	19.1	850	854	315 kg	300 kg	114S43	114S43AL	114S43AR	114S43B	114S43DL	114S43DR
76.2	19.1	900	904	320 kg	310 kg	114S40	114S40AL	114S40AR	114S40B	114S40DL	114S40DR
76.2	19.1	1000	1000	325 kg	315 kg	114S41	114S41AL	114S41AR	114S41B	114S41DL	114S41DR
76.2	19.1	1100	1098	305 kg	290 kg	114S44	114S44AL	114S44AR	114S44B	114S44DL	114S44DR
76.2	19.1	1200	1212	295 kg	280 kg	114S42	114S42AL	114S42AR	114S42B	114S42DL	114S42DR
76.2	19.1	1350	1358	245 kg	210 kg	114S48	114S48AL	114S48AR	114S48B	114S48DL	114S48DR
76.2	19.1	1500	1504	225 kg	195 kg	114S45	114S45AL	114S45AR	114S45B	114S45DL	114S45DR

Fixation metal cabinet or metal drawer side:

M5 / DIN 7984

M5 / M6 / ISO 7380





Thomas Regout International B.V.

Industrieweg 40
6219 NR Maastricht
The Netherlands

T. +31 (0)43 351 66 66
F. +31 (0)43 351 66 99

E. sales@thomasregout.com

www.thomasregout.com

